ViewSonic®
See the difference™

VX2460h-LED

All-New 24” LED Display with Stylish Ultra-Slim Package

The new ultra-slim VX2460h-LED 24” display featuring 6.8mm ultra slim thickness and an all-new fashion design bring a fresh perspective to the VX series, with stunning visual performance. The Energy Star® 5.1 certified display is equipped with LED backlighting and ECO Mode, extending lifetime and conserving more than 25% of the energy of a conventional display. With the 2 ms video response time provided by ClearMotiv® II imaging technology and ultrahigh 40,000,000 : 1 dynamic contrast ratio, this 24” 16 : 9 widescreen display presents superior pixel performance with Full HD 1080p resolution through dual HDMI inputs. The VX2460h-LED delivers amazing visual response with advanced imaging technologies that reduce eye fatigue after extended viewing and supports multi-window display without toggling, making it ideal for both home and office use.

6.8mm ultra-slim outlook and touch key

The all new display features an ultra-slim panel only 6.8mm deep and a glossy new bezel to complement any home or office setting. The sleek, seamless touch key provides a simple and intuitive operating experience. With just a light touch of your finger, convenient adjust your on-screen display settings.

Touch Key

Ultra-slim

Dual HDMI inputs for high definition presentation

Embedded dual HDMI inputs for multiple high quality multimedia device connection allow viewing of any high definition video playback, gaming and TV programs.

Planet-friendly LED backlighting and ECO Mode

Embedded mercury-free LED backlighting and ECO Mode features energy-saving with the three-phase self-adjusted power-saving mode, and its slimmer display is a space saver. VX2460h-LED enhances display performance by delivering an outstanding color range, contrast ratio and brightness output for remarkably defined images.

ViewSonic®
See the difference™

VX2460h-LED

All-New 24” LED Display with Stylish Ultra-Slim Package

ClearMotiv® II imaging technology provides blur-free, clear images

Innovative ClearMotiv® II imaging technology enables a fast 2 ms liquid crystal response time, resulting in crisp and clear video performance. Experience digital broadcast-quality, full-motion video with razor-sharp images that never blur.

Nomal

ClearMotiv® II

Superlative 40,000,000 : 1 dynamic contrast ratio

Dynamic contrast ratio defines a differentiating relationship between darkest and brightest colors when reproducing an image. With dynamic contrast ratio, VX2460h-LED is capable of automatically detecting the brightness and darkness of an image and adjusts the LED backlight accordingly. It maximizes grayscale and color ranges and boosts contrast ratio to an ultrahigh 40,000,000 : 1, resulting in rich, vibrant visuals.

Nomal

Dynamic Contrast Ratio

24” widescreen with Full HD 1080p

Brilliant pixel quality of the 1920 x 1080 Full HD 1080p panel supports all computer applications, graphics creation, games and HD home entertainment, delivering natural and vivid imagery. The 16 : 9 widescreen reduces eye fatigue after extended viewing and supports multi-window viewing without toggling.

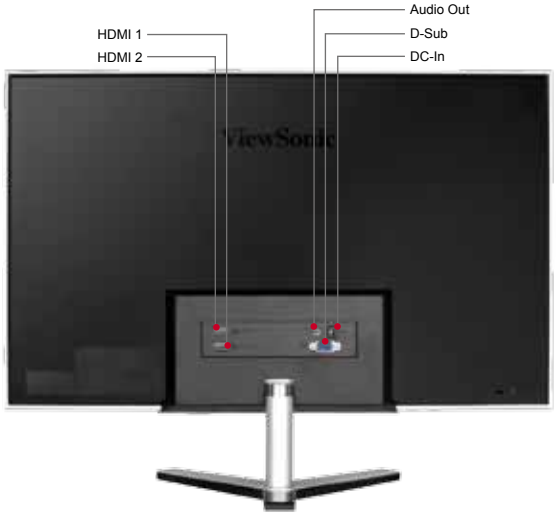

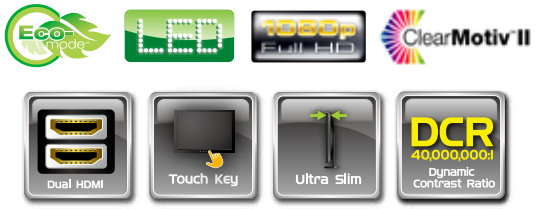

Specifications

LCD Panel	Display Area	23.6" wide
	Optimum Resolution	1920 x 1080
	Brightness	250 cd / m^2
	Contrast Ratio	1000 : 1 (typ.)
	Dynamic Contrast Ratio	40,000,000 : 1
	Viewing Angles	170° / 160° (typ.)
	Response Time	5 ms / G to G 2 ms
	Pixel Arrange	0.2715 mm x 0.2715 mm
	Panel Surface	Anti-glare type, 3H hardness
	Backlight	White-light LED
	Backlight Life	40,000 hours (min.)
Input	Video	RGB analog (75 Ω, 0.7 / 1.0 Vp-p) HDMI (TMDS, 100 Ω)
	Sync	Separate sync
	Frequency	Fh = 24 ~ 83 kHz ; Fv = 50 ~ 76 Hz
Compatibility	PC	VGA up to 1920 x 1080 (non-interlaced)
	MAC	Power MAC (supports up to 1920 x 1080)

Connector	Analog	15-pin mini D-sub *1
	Digital	HDMI 1.3 *2
	Audio Out	3.5mm jack audio out *1 (The audio source is from HDMI)
	Power	External power adapter
Ergonomics	Tilt	13° ~ -6°
Power	Voltage	AC 100 - 240V (universal); 50 / 60 Hz
	Consumption	28W (Max); 16W (ECO Mode)
Operating	Temperature	32° F to 104° F (0° C to 40° C)
Conditions	Humidity	20% to 90% (no condensation)
Dimensions	With Stand	
(W x H x D)	(mm)	581 x 447 x 194
	(inch)	22.87” x 17.6” x 7.64”
Weight	With Stand	3.5 Kg (7.72 lbs)
Regulations		CE,CB, BSMI, PSB, SASO, C-tick, e-standby, KC, UL/cUL, FCC-B (including ICES003), TUV-S, NOM, GOST-R/Hygienic, UkrSEPRO, Erp, CCC, China Energy, Energy Star, EPEAT Silver, WEEE, RoHS, SVHC list

What’s in the box?

Power Cord *1, AC/DC Adaptor *1, VGA Cable *1, HDMI Cable *1, Quick Start Guide *1, ViewSonic Wizard CD-ROM *1

*Specifications are subject to change without notice.